

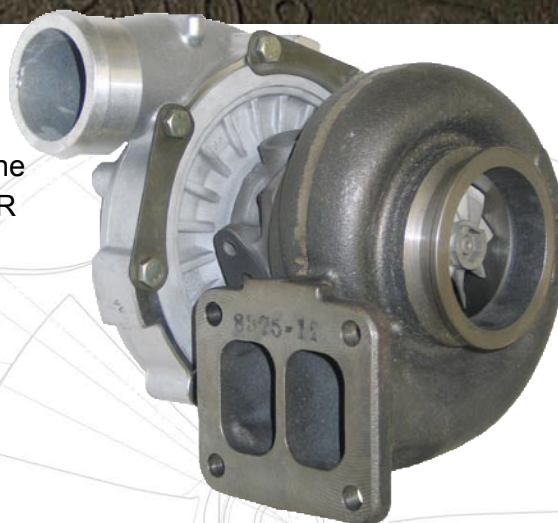


- Dual ball bearing, oil & water-cooled CHRA
- Free float, non-wastegated turbine housing
- Ideal for applications that cannot accomodate the GT4294R but need more flow than the GT4088R
- Outline interchangeable with the GT4088R
- Ported shroud compressor housing to increase surge resistance

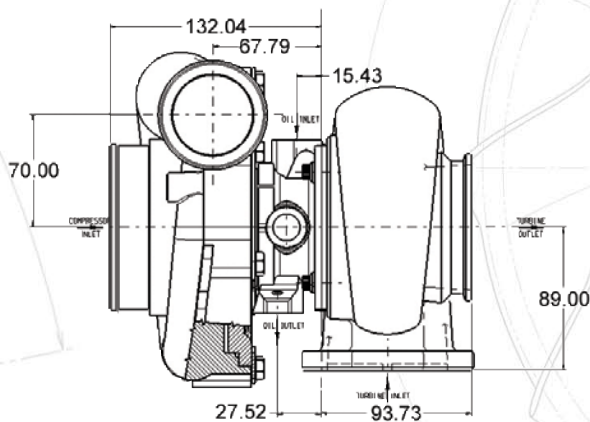

DISPLACEMENT 2.0L - 6.0L	HORSEPOWER 450 - 800	2000
		1900
		1800
		1700
		1600
		1500
		1400
		1300
		1200
		1100
		1000
		900
		800
		700
		600
		500
		400
		300
		200
		100
		0

GT4094R		COMPRESSOR				TURBINE		
Turbo PN	CHRA PN	Ind Whl Dia	Exd Whl Dia	Trim	A/R	Whl Dia	Trim	A/R
751470-19	751450-16	67.8mm	94.0mm	52	0.72	77.0mm	78	0.85
751470-20	751450-16	67.8mm	94.0mm	52	0.72	77.0mm	78	0.95
751470-21	751450-16	67.8mm	94.0mm	52	0.72	77.0mm	78	1.06
751470-22	751450-16	67.8mm	94.0mm	52	0.72	77.0mm	78	1.19

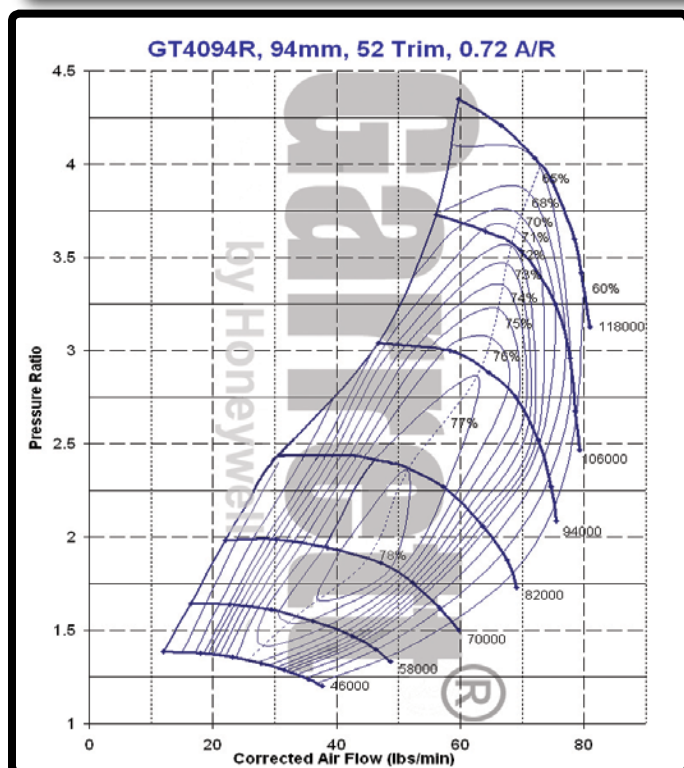

TURBINE HOUSING OPTIONS	
PN	A/R
448375-18	0.85
448375-19	0.95
448375-20	1.06
448375-21	1.19

